


## HIGH RISE SCISSOR LIFT

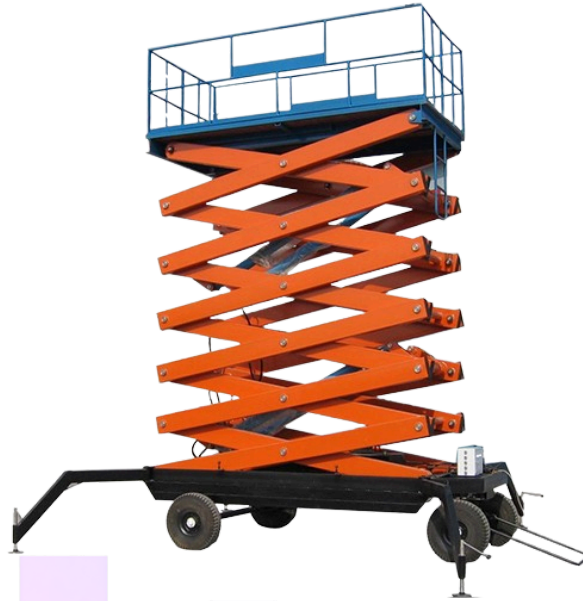

MODEL	AT - 1034_A	AT - 1034_B	AT - 1034_C	AT - 1034_D	AT - 1034_E	AT - 1034_F	AT - 1034_G	AT - 1034_H	AT - 1034_I	AT - 1034_J
S.W.L ON EXTENSION	500 KG	500 KG	500 KG	500 KG	500 KG	500 KG	300 KG	1000 KG	1000 KG	1000 KG
PLATFORM HEIGHT MAX	6M	7.5M	9M	11M	12M	14M	16M	6M	9M	12M
PLATFORM SIZE (L*W)	1.85 X 0.88M	1.8 X 1.00M	1.8 X 1.00M	2.1 X 1.15M	2.45 X 1.35M	2.45 X 1.35M	2.75 X 1.5M	1.8 X 1.00M	1.8 X 1.25M	2.45 X 1.35M
OVERALL SIZE (L*W*H)	2.07 X 1.04 X 1.45M	2.07 X 1.16 X 1.70M	2.07 X 1.16 X 1.87M	2.37 X 1.31 X 1.83M	2.72 X 1.51 X 1.83M	2.72 X 1.51 X 2.16M	3.02 X 1.68 X 2.70M	2.07 X 1.20 X 1.55M	2.07 X 1.45 X 1.87M	2.72 X 1.51 X 1.90M
LIFTING TIME	54S	72S	80S	88S	90S	120S	130S	80S	100S	135S
MOTOR POWER	1.5KW	1.5KW	1.5KW	2.2KW	3KW	3KW	3KW	2.2KW	3KW	4KW
POWER VOLTAGE	AC380V	AC380V	AC380V	AC380V	AC380V	AC380V	AC380V	AC380V	AC380V	AC380V
WEIGHT	650KG	1100KG	1260KG	1380KG	1850KG	2150KG	2680KG	950KG	1510KG	2700KG
TYRE	Ø200 PNEUMATIC/SOLID RUBBER TYRE	Ø400-8 PNEUMATIC/SOLID RUBBER TYRE	Ø400-8 PNEUMATIC/SOLID RUBBER TYRE	Ø500-8 PNEUMATIC/SOLID RUBBER TYRE	Ø500-8 PNEUMATIC/SOLID RUBBER TYRE	Ø500-8 PNEUMATIC/SOLID RUBBER TYRE	Ø500-8 PNEUMATIC/SOLID RUBBER TYRE	Ø500-8 PNEUMATIC/SOLID RUBBER TYRE	Ø500-8 PNEUMATIC/SOLID RUBBER TYRE	Ø500-8 PNEUMATIC/SOLID RUBBER TYRE

***Note : Any changes to specifications or dimensions are possible. We should talk about the suggested application if these standards are important.***

altra